


NEW! Now with zero leakage – in combination with “SHR”\* premium soft seal\* (now up to +220°C)

# SAFE



Variable & safe – in more than 35,000 variations!

**NEW**  
with SHR\*!

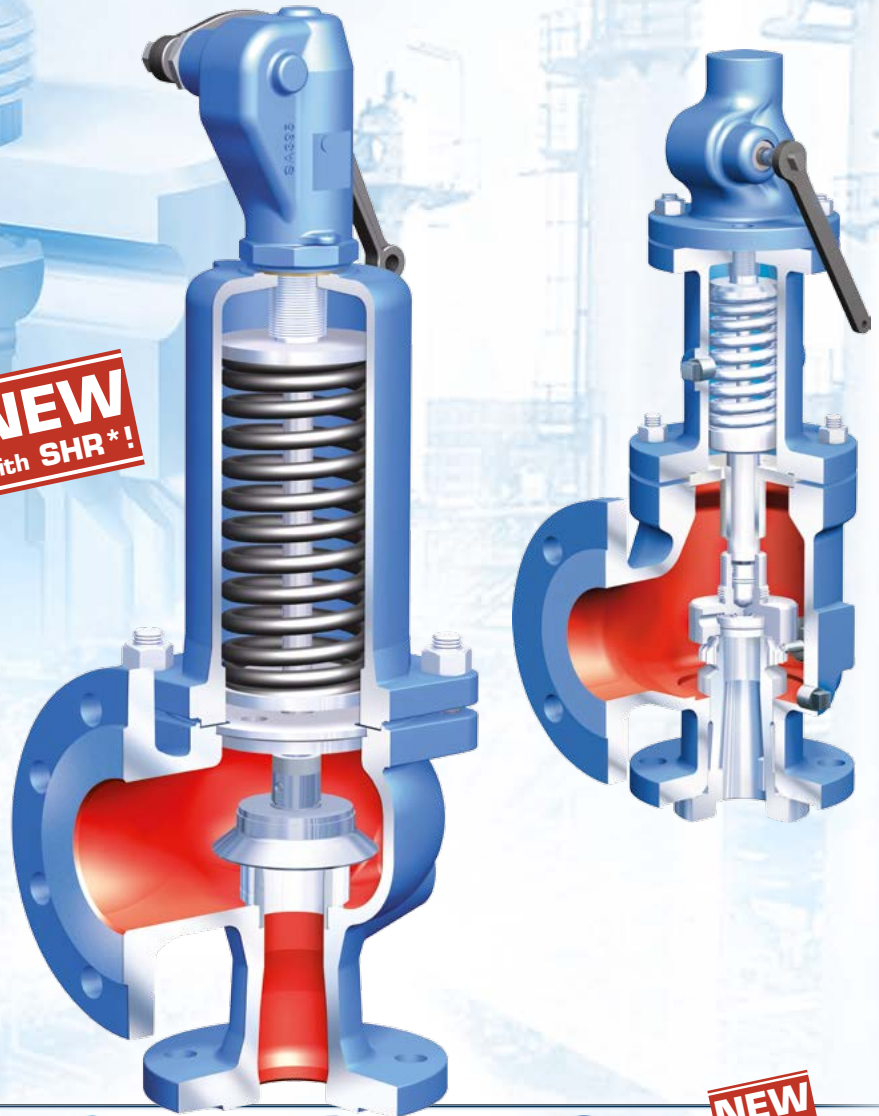

\* Steam-/Hot Water-Resistance

**NEW**  
with SHR\*!



**SAFE**  
Full-lift safety  
valve

**SAFE-P**  
for small  
capacities

**SAFE TC**  
thread connections

**SAFE-TCP / TCS**  
for high pressures


**ARI-REYCO™**  
according to  
API 526

**SAFE-SHR\***  
premium soft seal  
up to +220°C

Now with zero leakage – in combination with the innovative premium soft seal

# “SHR”\*

## For steam and hot water up to +220°C!

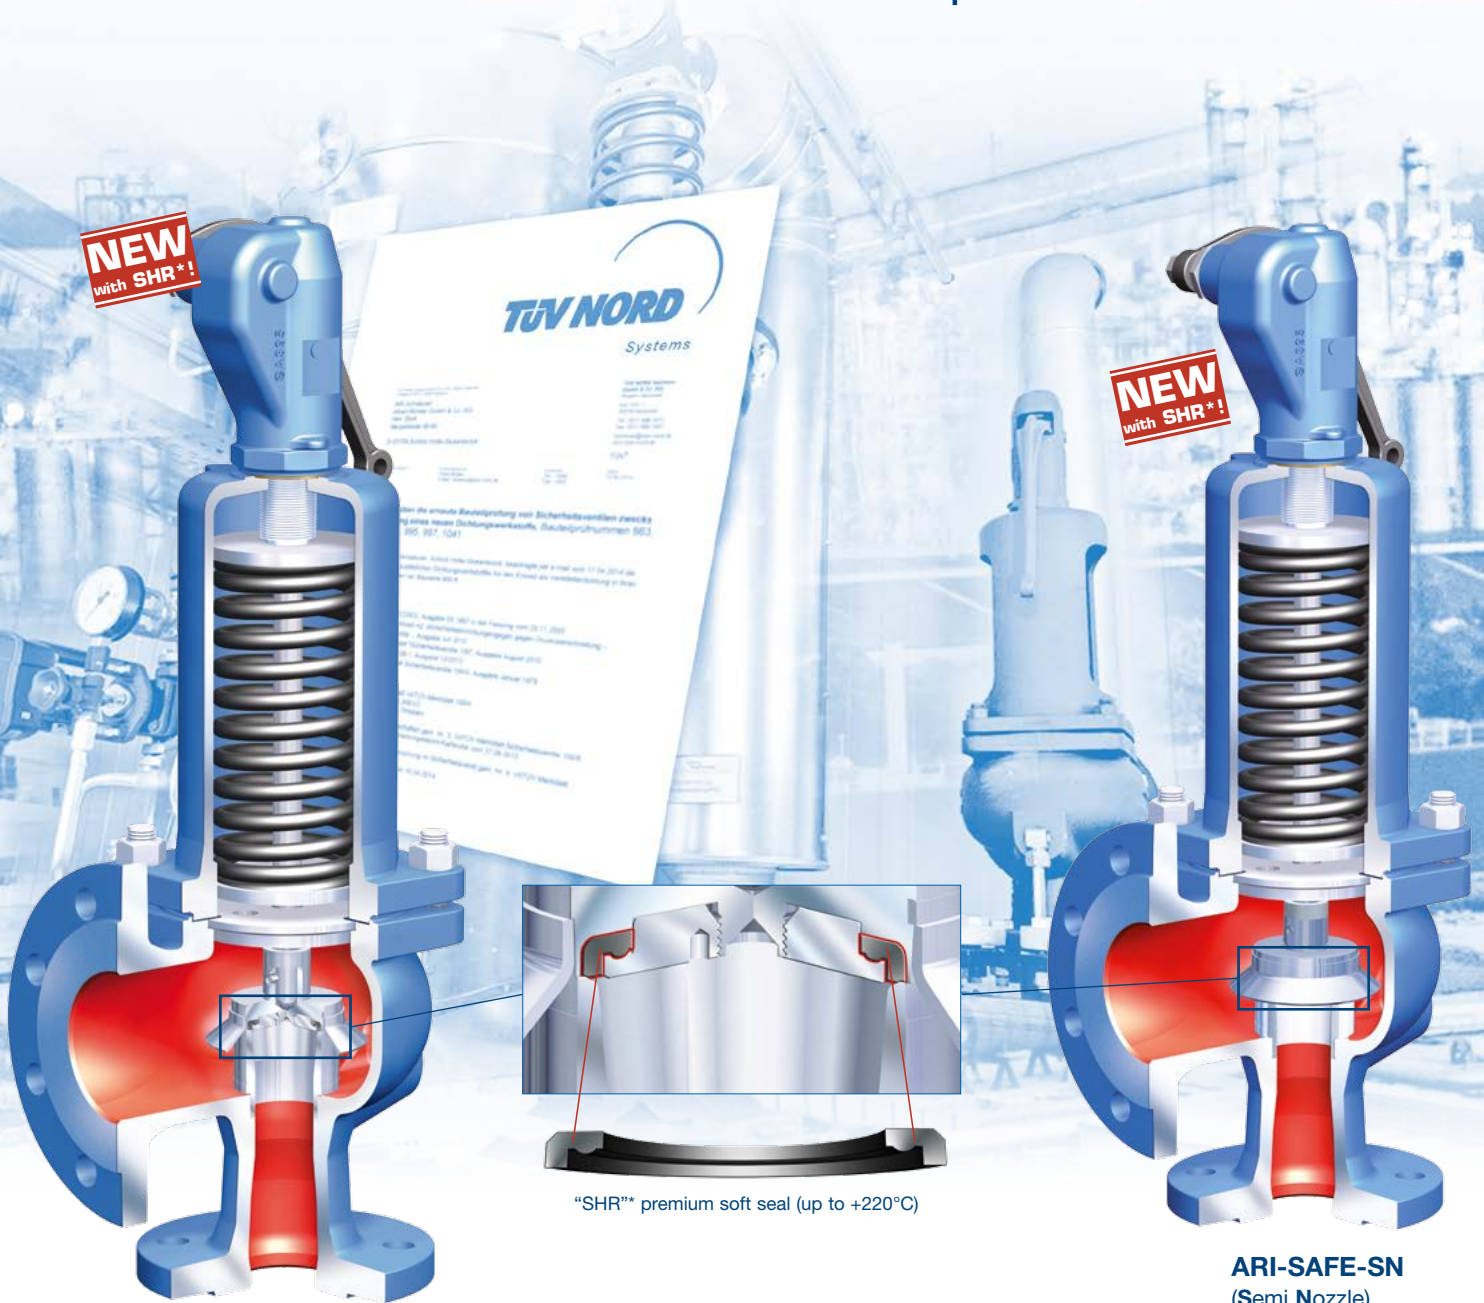

**ARI-SAFE-900**

**ARI-SAFE-SN**  
(Semi Nozzle)

### Steam-/Hot Water-Resistance:

- Suitable for SAFE 900 and SAFE SN (Semi Nozzle)
- Even better economy through extended lifetime (optimal leakproofness)
- Type test approved acc. to VdTÜV
- Ideal for steam and hot water generators acc. to DIN EN 12953 (TRD 421), e.g. shell boilers

\* Steam-/Hot Water-Resistance



[www.ari-armaturen.com](http://www.ari-armaturen.com)